

18G HDMI 4X1 SWITCH with Toslink

USER MANUAL

DEAR CUSTOMER

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting product. Please keep this manual for future reference.

1.0 INTRODUCTION

This 4 by 1 HDMI UHD Switch with HDCP 2.2 is an advanced solution for switch 4 input to 1 outputs. It provides high performance audio and video output through HDMI cable up to 4K2K@60HZ(YUV444) resolution and is capable of receiving and transmitting up to 18Gbps of bandwidth with no data loss.It supports HDR and supports audio1.Four ports HDMI input,One port HDMI output

2.Video resolutions up to 4K2K@50/60Hz (YUV444),4K2K@30HZ,1080P@120HZ,and 1080P 3D@60HZ

3.Compliant with HDMI HDMI2.0(18Gbps),HDCP 2.2

4.Support LPCM 7.1 CH, Dolby True HD, and DTS-HD Master Audio

5.Supports HDCP, 3D and CEC bypass

6.Supports audio extract function with Toslink

7.With ARC function

extractor with Toslink. Furthermore , the remote control gives uses to complete control over the selection of sources and makes the device incredibly user friendly.

2.0 FEATURES

3.0 PACKAGE

1.Main Device.....	1pcs
2.5V/1A DC Power adapter.....	1pcs
3.Remote controller.....	1pcs
4.User manual.....	1pcs
5.Neutral Packing.....	1pcs

4.0 SPECIFICATIONS

Input ports.....4XHDMI(Female type)

Output port1XHDMI(Female type)

Video Bandwidth.....600Mhz/18Gbps

Remote controller Support.....IR and Panel button control

Audio Support.....LPCM 7.1 CH, Dolby True HD, and DTS-HD Master Audio

Video resolution.....Up to 4KX2K/60HZ

Operating Temperature.....0°C to 40 °C/32°F to 104°F



Storage Temperature.....-20°Cto 60 °C/-4°F to 104°F

ESD protection.....±8KV(air -gap discharge) ±4KV(contact charge)

Dimensions.....175MM X95MMX21MM

Weight.....400g

5.0 FRONT AND BACK PANEL

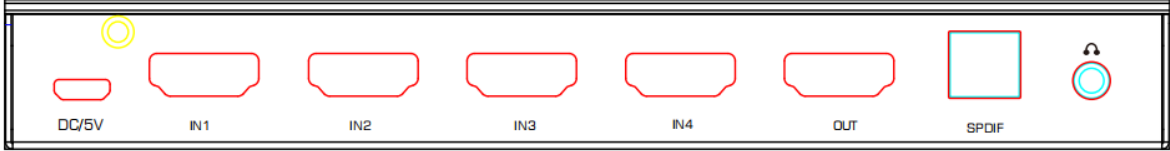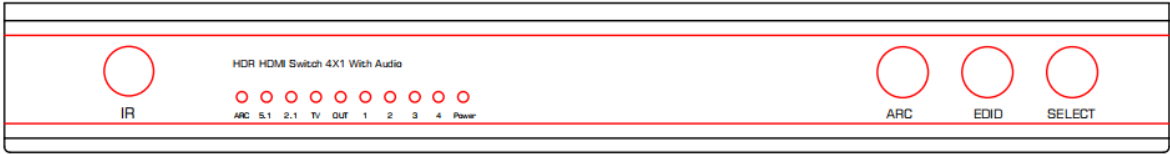

6.0 CONNECTION DIAGRAM

