

# Wireless HDMI Extender

## SPECIFICATION S101




S101 includes one wireless sender and one wireless receiver. Plug the receiver with the TV, and connect the wireless video transmitter with the video source. The wireless video sender and receiver will pair automatically and start the transmission.

Easy and simple connection. Without configuration or user intervention, the transmitter and receiver will connect automatically after power on.

Equipped with the 802.11 ac MIMO technology, which is several times faster than the previous Wi-Fi standard, with more strong anti-interference ability, an excellent solution for HD video streaming.

No worries about the data security. Wireless AV mini support AES 128-bit security encryption and WPA2/WPA-PSK/WPA2-PSK authentication protocol to protect data.

### Connection Diagram:

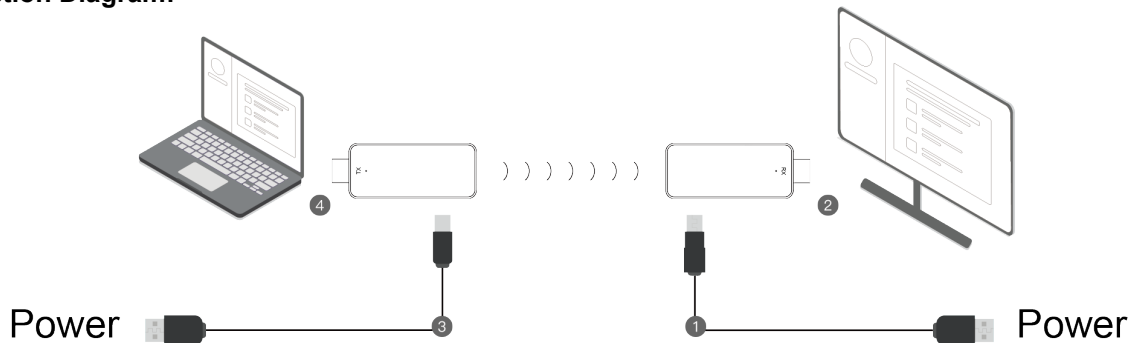

### Features:

- . Low Latency: About 120ms latency
- . Resolution: up to 1080p/60
- . Plug and Play, no setup
- . 5.8G 2T2R Wi-Fi module
- . Auto Pairing, auto connection
- . Distance up to 20 meter in the clear line of sight
- . WPA2/WPA-PSK/WPA2-PSK security standard
- . HDMI Version: HDMI 1.4

### SPECIFICATION S101

Video Input	1920x1080 (1080p60/50/30/25/24, 1080i60/50) 1280x720 (720p60/50) 720x576 (576p50) 720x480 (480p60)
Video decode and output	Up to Full HD, 1080p/60 Hz
Audio	Stereo, quality 16bits 48KHz
Wireless Channel	IEEE 802.11ac, 5GHz, 2T2R
Latency	Around 120ms latency
HDMI Version	HDMI 1.4 with HDCP1.3
Authentication Protocol	WPA2 (WPAS-PSK / WPA2-Enterprise)
Security	AES 128 bit
Platform supported	Any devices with HDMI jack
Distance	About 20 meters in the clear line of sight